


2.4/5 GHz 6 dBi MIMO Patch Antenna

TerraWave's 2.4/5 GHz, 6 dBi patch MIMO antenna is designed to operate with Cisco's 1552e and 1602e access points. The antenna includes three 36" leads that are terminated with RPTNC Plug connectors. With dual-band leads this MIMO Patch Antenna can support demanding applications. Utilizing a ruggedized radome this antenna can safely function in challenging outdoor environments where exposure to dust and moisture are present. Included is an articulating mount, allowing for easy installation. *Every TerraWave antenna is covered by the company's two-year TerraNet warranty program. For questions or to purchase product, contact your Regional Sales Executive at 210-375-8482, 800-851-4965 or sales@terra-wave.com.*

Specifications	
Model	M6060060MP1D33602
Frequency Range	2400 ~ 2500 MHz 5150 ~ 5850 MHz
Gain	6 dBi
Vertical Beamwidth	70° 50°
Horizontal Beamwidth	90° 50°
VSWR	≤2
Front-to-back Ratio	≥25
Polarization	Vertical
Max Power	20 Watts
Connector	RPTNC Plug
Pigtail Length	3 x 36" (w/ Connector)
Dimensions	7.5" x 7.5" x 1.6"
Weight	1.76 lbs
Mount Style	Universal Articulating Mount

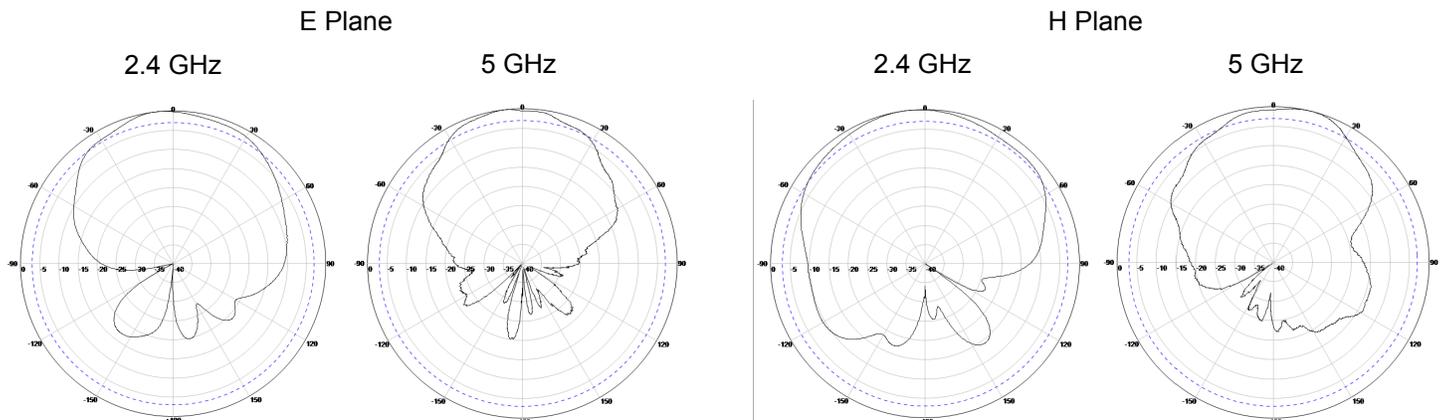

Mast Mount with Articulating Mount:
Note: Articulating Mount can also be Wall Mounted

